

TRANSIT CLASSIC® 传递经典®

gerflor.com
gerflor.cn



Gerflor[®]
theflooringroup

WOOD 木纹



0228 Pearl - Walnut




0230 Straw - Amboise




0231 Golden - Amboise



0229 Cappuccino - Walnut

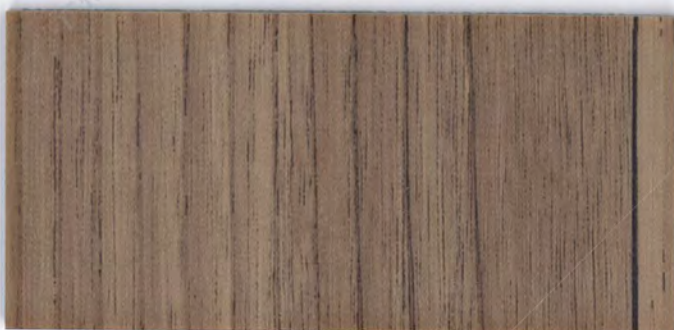

0501 Yellow Grey - Walnut

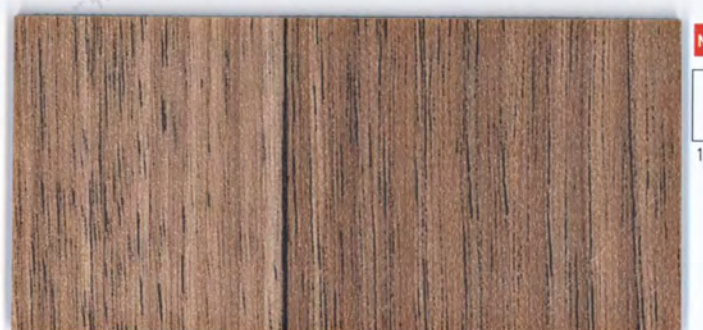

0227 Wheat - Walnut



WOOD 木纹




0245 Mid Beige - Compose



0244 Blue Gray - Compose



SWISS STONE 云石

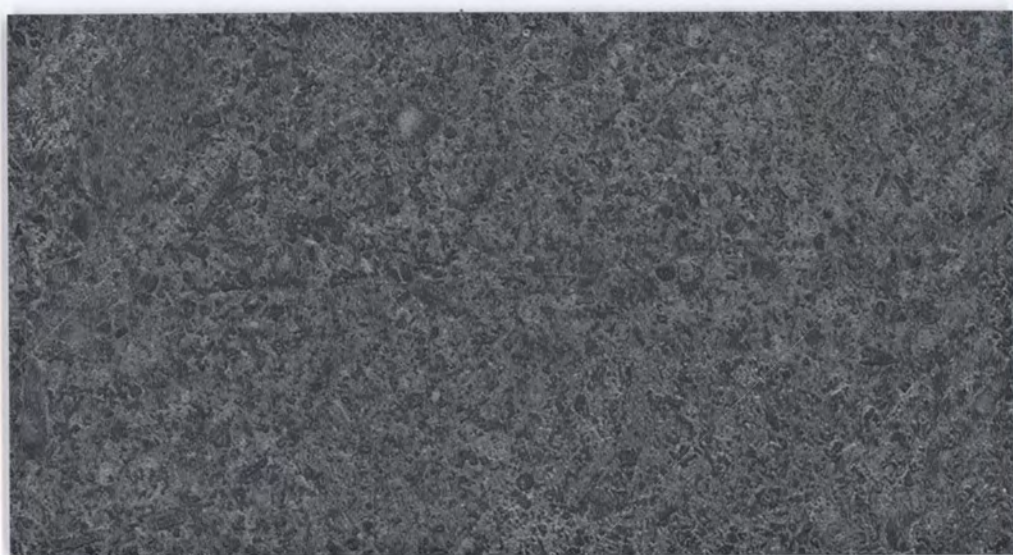

NEW

0240 Dark Gray



NEW

0242 Light Beige



NEW

0239 Light Gray



NEW

0241 Mid Gray



NEW


0243 Beige



TEXTURA 特斯佳



0309 Ash

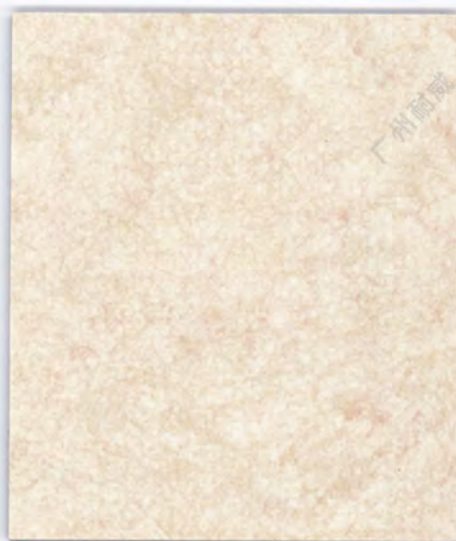

0304 Cream



0307 Ciel



0310 Acier



0303 Chocolat



0232 Pine



NEW



0311 Smoke



0233 Tea




0312 Ruby



NEW


COLUMBO 哥伦布

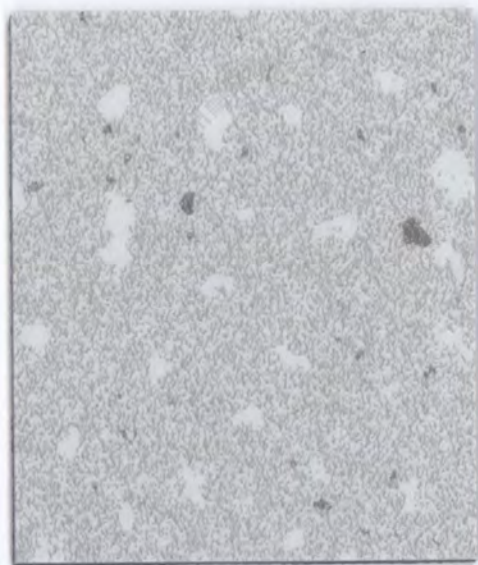


0211 Chrome




0201 Bruyere

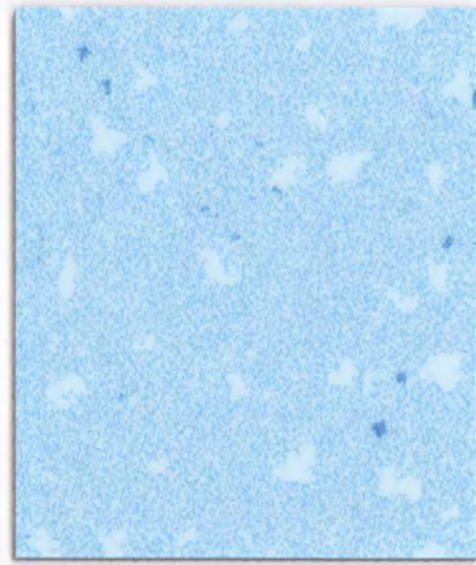


0235 Sky

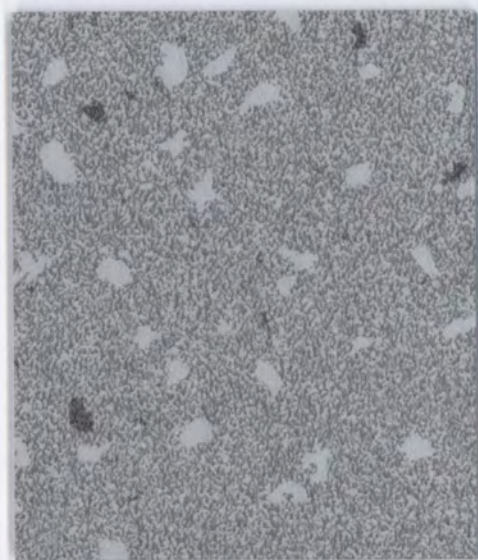

0210 Jais

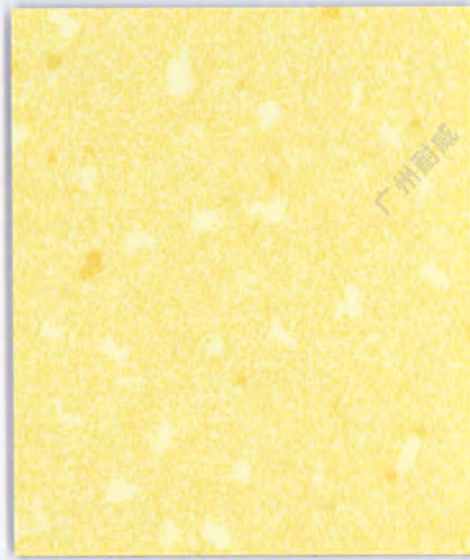


0234 Egg

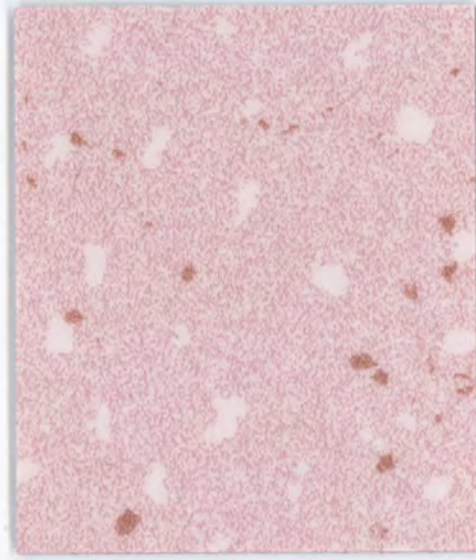


0237 Pink



0209 Ebene

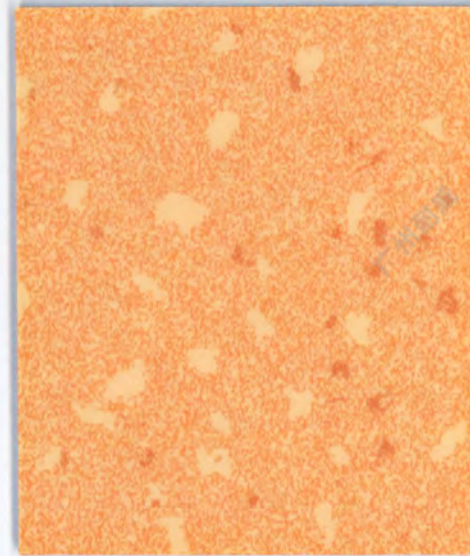

0238 Kumquat

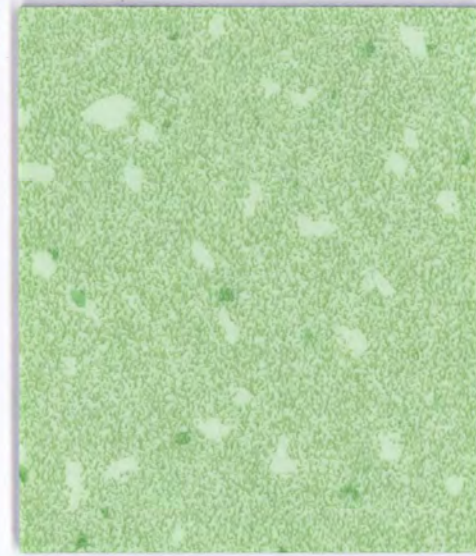


0236 Grass



| | | |
|---|--------------|---|
|  | <p>23-31</p> |  100% recyclable |
|---|--------------|---|

TEXTURA / COLUMBO / SWISS STONE / WOOD 特斯佳 / 哥伦布 / 云石 / 木纹

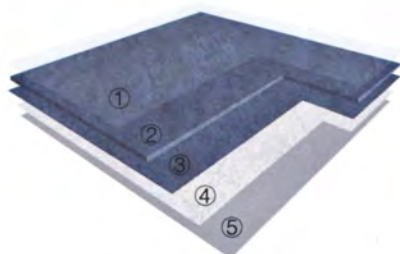

- ① PUR Protect special maintenance treatment
PUR Protect 特殊维护处理
- ② Transparent wear layer 透明耐磨层
- ③ Printed design 印刷设计层
- ④ Fiber glass reinforced layer 玻璃纤维加强层
- ⑤ Compact back layer 致密背层


PUR Protect special maintenance treatment with high resistance to scratching, scuffing & easy cleaning.
PUR Protect 特殊维护处理，出色的抗刮痕性及耐鞋底刮擦性能，易于清洁保养。

No DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, friendly to health and environment.
无DOP、无重金属、无苯、无甲醛，100%符合欧盟REACH法规，健康环保。

Transparent wear layer with printed designing, highest durability.
透明耐磨层，印刷花纹设计，经久耐用。

Recommended for education, office, retail, hospital and institutional buildings.
适用于教育、办公、零售、医疗和公共建筑等领域。

Compact backing with fiber glass reinforced layer. High resistance to static and dynamic indentation under rolling loads, and excellent dimensional stability.
玻璃纤维加强层及致密背层，优异的耐压痕性能，可抵抗静、动滚轮载荷，尺寸稳定不易变形。

 Compact sheet, without foam backing
致密卷材，无泡沫背层



TRANSIT CLASSIC® is a multilayered compact vinyl floor covering, available in 2m width sheet. The product comprises a printed design protected by a transparent wear layer, and a compact backing with fiber glass reinforced layer, which resists static and dynamic indentation under rolling loads and provides excellent dimensional stability.

TRANSIT CLASSIC® is treated with PUR Protect special maintenance treatment with high resistance to scratching, scuffing & easy cleaning, bacterial and fungicidal contamination. It has no DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for education, office, retail, hospital and institutional buildings.

传递经典® 是多层致密PVC地面材料, 可供2米宽规格的卷材。表面花纹图案在透明耐磨层的保护之下经久不变。玻璃纤维加强层及致密背层使产品具有优异的耐压痕性能, 可抵抗静、动滚轮载荷, 尺寸稳定不易变形。

传递经典® 经过PUR Protect特殊维护处理, 出色的抗刮痕性及耐鞋底刮擦性能, 易于清洁保养。该产品无DOP, 无重金属、无苯、无甲醛, 100%符合欧盟REACH 法规, 健康环保, 适用于教育、办公、零售、医院和公共建筑等领域。

TEXTURA / COLUMBO / SWISS STONE / WOOD
特斯佳 / 哥伦布 / 云石 / 木纹

DESCRIPTION 规格

| | | | |
|---------------------------|--------------------|------------------|------|
| Total thickness 总厚度 | ISO 24346 [EN 428] | mm | 2.0 |
| Wearlayer thickness 耐磨层厚度 | ISO 24340 [EN 429] | mm | 0.3 |
| Weight 重量 | ISO 23997 [EN 430] | g/m ² | 3150 |
| Width of sheet 卷宽 | ISO 24341 [EN 426] | cm | 200 |
| Length of sheet 卷长 | ISO 24341 [EN 426] | lm | 20 |

CLASSIFICATION 类别

| | | | |
|-----------------------------------|--------------------|-------|--------------------|
| Norm / Product specification 产品规范 | - | - | ISO 10582 [EN 649] |
| European classification 产品分级 | ISO 10874 [EN 685] | class | 23 - 31 |
| Fire rating 防火等级 | EN 13 501-1 | class | Bfl-s1 |
| | GB 8624 - 2012 | class | B1(B-s1,t0) |
| Toxic testing 有毒有害物质检测 | GB 18586-2001 | - | 合格 |
| Static electrical propensity 抗静电性 | EN 1815 | KV | <2 |
| Slip resistance wet 防湿滑性 | DIN 51 130 | class | R9 |

PERFORMANCES 性能

| | | | |
|---|----------------------|---------|-------------|
| Type binder content 粘合物等级 | ISO 10581 | type | I |
| Dimensional stability 尺寸稳定性 | ISO 23999 [EN 434] | % | ≤ 0.4 |
| Residual indentation 残余凹陷度 | ISO 24343-1 [EN 433] | mm | ≤ 0.1 |
| Castor chair test 椅子脚轮测试 | ISO 4918 [EN 425] | - | OK |
| Thermal conductivity 热传导性 | ISO 10456 [EN 12524] | W/(m.K) | 0.25 |
| Colour fastness 颜色稳定性 | ISO 105 - B02 | degree | ≥ 6 |
| Chemical products resistance 抗化学性 | ISO 26987 [EN 423] | - | OK |
| Special maintenance treatment 特殊维护处理 | - | - | PUR Protect |
| Anti-bacterial activity 抑菌性能 (E.coli - S.aureus - MRSA 大肠杆菌和金黄色葡萄球菌) (1) | JIS Z 2801 | - | > 99% 抑菌率 |

ENVIRONMENT / INDOOR AIR QUALITY 环保 / 室内空气质量

| | | | |
|--|---------------|-------------------|-------------|
| TVOC after 28 days 28天后TVOC ⁽²⁾ 排放量 | ISO 16000 - 6 | µg/m ³ | < 100 |
| Certification 证书 | - | - | Floorscore® |

CE MARKING CE标志

| | | | |
|----|----------|---|--|
| CE | EN 14041 | - | |
|----|----------|---|--|

(1) The implementation of an effective cleaning regime is the most important defence against infections.

实施有效的清洁方法是抗感染最重要的防御措施。

(2) TVOC: 挥发性有机化合物总排放量



TRANSIT CLASSIC®, ACTIONS SPEAK LOUDER THAN WORDS 传递经典®, 行动胜过空谈

| | | | | | |
|--|---|--|---|--|---------------------------|
| COMPOSITION 100% REACH compliant 成份100%符合 REACH规定 | INDOOR AIR QUALITY 室内空气质量 28天后TVOC 排放 < 10ug/m ³ , 低于标准100倍 | RECYCLED CONTENT 20% 成分环保, 回收物质含量 20% | RECYCLABILITY 100% 产品 100% 可回收 | LCA 采用产品的生命周期分析模型, 进行专属的生态概念设计 | WELLNESS 健康 |
|--|---|--|---|--|---------------------------|



随时找到 Gerflor® 洁福®



请微信扫码, 关注Gerflor® 洁福®

洁福 Gerflor®

theflooringgroup

GERFLOR CHINA 洁福中国

SHANGHAI BRANCH 上海分公司 Tel. / 电话: +86-21-63578818

BEIJING BRANCH 北京分公司 Tel. / 电话: +86-10-65836986